





ACCENT DMX

Programmable Preset Lighting Control

- ❑ Two, Four and Eight Preset Control Stations with individual preset fade times
- ❑ Raise Lower Mastering
- ❑ Up to 48 dimmers per room, up to 8 stations and 8 rooms per system
- ❑ Room selection by dip switch selection on control station no special programming required
- ❑ Compatible with all Strand Dimmer Racks
- ❑ Wireless IR remote provided with each station for simple programming and remote preset access
- ❑ Secure Fastener Free Faceplates
- ❑ Secure digital control wiring system
- ❑ Fits Standard 1 Gang Deep Masonry box (supplied for all European installations)
- ❑ DMX Output

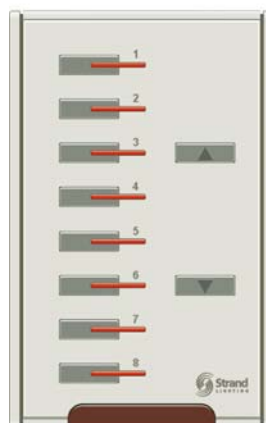

63200
8 Preset Station w/
Raise-Lower control

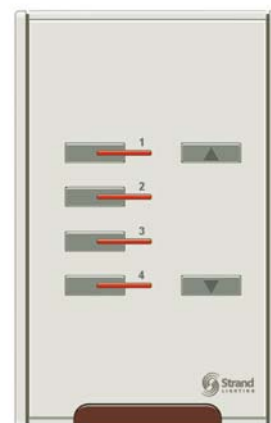


63201
Four Preset Station w/
Raise-Lower control

Ordering Information

Cat No	Description
63200	Eight Preset station with IR Remote
63201	Four Preset station with IR Remote
63202	Two Preset station with IR Remote
63203	IR Remote (Spare)
63206	Accent Power Supply



63203 Wireless IR Remote Programmer

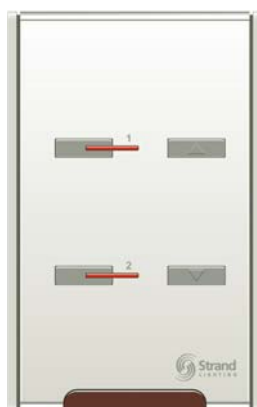


63202 Two Preset Station w/ Raise-Lower Control




System Information

Accent DMX stations are simple to use and operate. Each station supports up to 48 DMX dimmers. Room 1 has dimmers 1-48, room 2 has dimmers for 49-96 and each additional room increments in blocks of 48 to a maximum of 8 rooms. Room selection is via dipswitch on the back of each station. Digital Environ, LD90 CD80 and SLD racks support DMX patching allowing the creation of smaller rooms using their integrated Mux patch functionality.

Each station has a built in IR port for use with the included IR remote programmer. The programmer allows the operator to record, modify and playback presets on each station. Designed to fit in a single gang back box these stations provide a clean simple to use control interface. Presets can be selected at the touch of a button and the integrated raise lower keys allow the operator to master an entire preset proportionally.

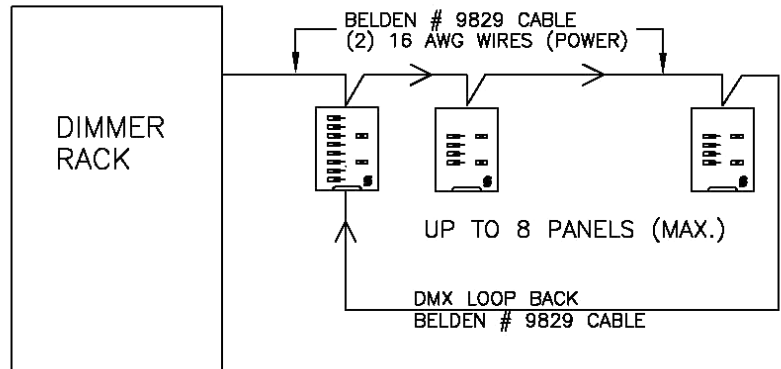

TYPICAL RISER FOR UP TO EIGHT STATIONS

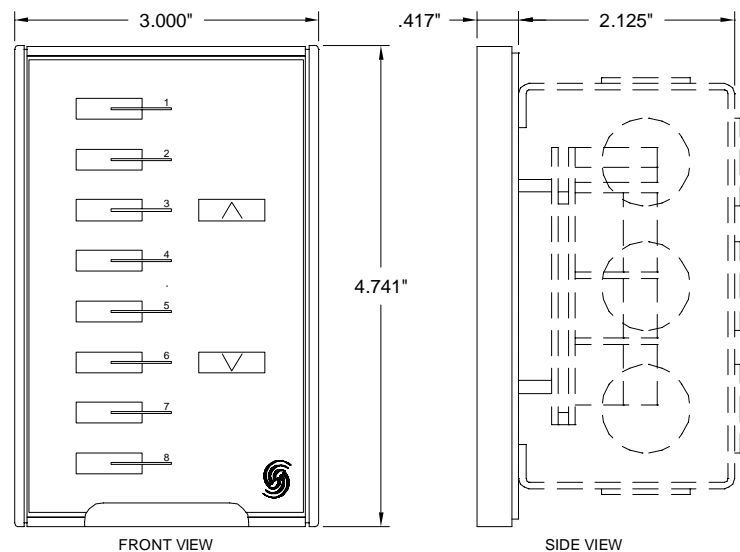

Back boxes are supplied with all stations

Strand Lighting Ltd
 Unit 3 Hammersmith Studios, Yeldham Road,
 Hammersmith, London W6 8JF United Kingdom
 Tel: +44 (020) 8735 9790
 Fax +44 (020) 8735 9799

Strand Lighting GmbH
 Ullsteinstrasse 114-142 D-12109
 Berlin, Germany
 Tel: +49 (0) 30/70 79 51 0
 Fax: +49 (0) 30/70 79 519 9

Strand Lighting Italia srl
 Via delle Gardenie 33 00040
 Pomezia-Roma, Italy
 Tel: +39 06 919631
 Fax: +39 06 9147136

Strand Lighting Asia
 20/F Delta House, 3 On Yiu Street
 Shatin, N.T. Hong Kong
 Tel: (852) 2757 3033
 Fax: (852) 2757 1767



The Company reserves the right to make any variation in design or construction to the equipment described.
 © Strand Lighting Ltd. 2002
 Strand™, Strand Lighting™, Strand Quartzcolor™ are trademarks of Strand Lighting Limited and Strand Lighting Inc.