

## Features

- Single preset operation
- Grand Master
- DMX Control
- Rugged case
- Power LED



## Overview

This excellent value manual lighting control desk is perfect where minimal control is all that is required. The Level 6 DMX is a conventional small manual single preset lighting control desk.

## Ordering Information

Level 6 DMX (UK PSU): 00-629-11

Level 6 DMX (Schuko PSU): 00-629-21


## Supplied Accessories

Power Supply

Operating Manual

## Specifications

- Control Channels: 6
- Channel Faders: 6
- Grand Master Faders: 1
- Power Supply (external): 100-240VAC, 47-63Hz, IEC320-C14 mains inlet connector. Lead with DIN4 connector to desk
- DMX Output: DMX512-A via 5 pin female XLR connector
- Dimensions: 53mm(H) x 222mm(W) x 110mm(D)
- Weight: 0.87 Kg
- Operating Temperature: +5°C to +40°C
- Humidity: 5% to 95% Non condensing

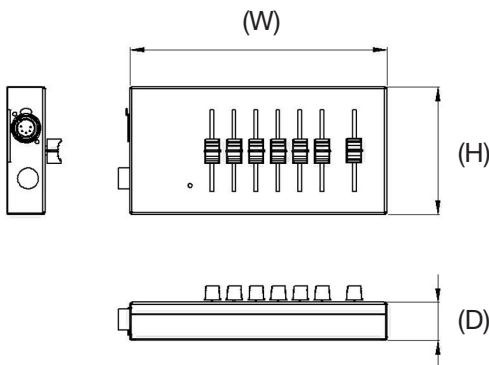

53mm(H) x 222mm(W) x 110mm(D)

<b>Voltage</b> 	100V	<input type="checkbox"/>	220 - 240V NON CE	<input checked="" type="checkbox"/>	<b>Standards</b> 	
	110 - 127V	<input type="checkbox"/>	277V	<input type="checkbox"/>		
	230V CE	<input checked="" type="checkbox"/>	347V	<input type="checkbox"/>		

This product conforms to one or more of the above standards. Please contact your local Cooper Controls representative for further information.

### Zero 88

Cooper Controls Ltd, Usk House, Lakeside Close,  
 Llantarnam Park, Cwmbran, NP44 3HD, UK.  
 Tel : +44 (0) 1633 838088 Fax : +44 (0) 1633 867880  
 E-mail : enquiries@zero88.com web : www.zero88.com